

REO 4600 with ProtectionOS

Versatile, Disk-Based Backup and Recovery Appliances

Besides its people, a company's data is one of its most critical assets. Keeping that data stored, accessible and secure has become complex and expensive as companies are faced with massive data growth, increasingly stringent regulatory requirements and distributed environments that can range from across-the-hall to across-the-globe. Overland Storage® recognizes the need for businesses to do more— with less, and offers effortless data management and protection solutions. Overland Storage REO 4600® emulates multiple tape libraries over a Fibre Channel or iSCSI interface and seamlessly integrates with the existing backup infrastructure to enable cost-efficient long term retention on disk and more reliable, high-speed recoveries of backup data.

Proven Data Protection

Unlike tape solutions and other disk-based back up systems, only the REO Series® includes REO ProtectionOS® software, which embeds data protection intelligence. When configured as virtual tape, backup data is written sequentially and in large blocks, which results in greater backup performance.

Easy to Set up and Manage

REO 4600 appliance is compatible with all popular open systems and Windows-based backup software, physical tape drives and libraries that easily connect to existing Ethernet (iSCSI) and Fibre Channel networks for seamless integration without changes to existing backup processes. An intuitive and robust browser-based graphical user interface makes REO easy to configure and manage. Users can proactively monitor REO appliances and receive e-mail alerts for instant notification of status changes.

Flexible Connectivity

Every REO Series system includes our patent-pending Dynamic Virtual Tape™ (DVT) technology, which ensures that no storage capacity is wasted while eliminating the manual effort and guesswork of sizing, configuring, provisioning and deleting virtual tape cartridges. With DVT, users can create virtual tape cartridges that automatically expand or contract to match the exact capacity requirements of the backup operation.

Boost Performance

Faster data protection increases IT performance by reducing CPU, network and storage overhead. While the REO Series maximizes backup and recovery performance, when leveraged with a NEO Series Tape Library as part of a D2D2T (Disk-to-Disk-to-Tape) strategy for tiered data protection, the combined technologies enable staged backups that can take just minutes without losing the ability to store tapes offsite. The result is the ability to backup and restore data at disk drive speeds while maintaining a reliable long-term archive strategy with tape.


Total Efficiency

Smaller backup windows and faster data recovery represent only a fraction of the efficiencies gained with the REO VTL technology. The REO Series products provide better capacity utilization with the high performance data compression option. Compression is a tried and true technology for cost effectively reducing data sizes. The REO Series products are also equipped with an auto disk spin-down feature to ensure that the system is consuming only the amount of power required to backup data.



Highlights

- User-defined functionality for Virtual Tape Library, Virtual Tape Drives and Disk Volumes (LUNs)
- Compatible with all popular backup software
- Ethernet (iSCSI) and Fibre Channel connectivity
- Up to 6 virtual tape libraries and 512 virtual tape cartridges can be created and configured with up to 32 virtual tape drives (16 drives maximum per library)
- Up to 64 standalone devices can also be created utilizing a mix of virtual tape drives and/or disk volumes.
- Drive spin-down conserves energy
- Over 100TB raw capacity, 200TB useable compressed virtual tape capacity

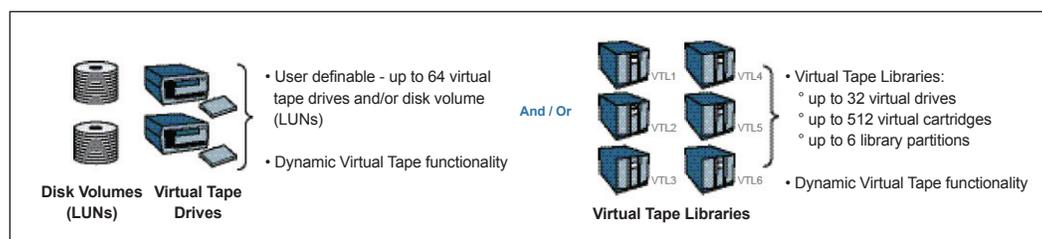

Hardware Compression Option:

The hardware compression option effectively doubles the useable virtual tape capacity of the REO 4600 and connected expansion arrays, making it the most cost effective way to store more backup data on disk. The combination of hardware compression and Dynamic Virtual Tape ensure REO is the most efficient and cost effective VTL available.

Specifications

Capacity	REO 4600 base system ships with 12 drives installed, pre-configured as RAID 6 with a hot spare but can be re-configured to RAID 5 or RAID 6 with or without hot spare.
Multi-Stream Performance	With hardware compression enabled, 16 streams, 8 stream per FC Port <ul style="list-style-type: none"> • Write: 480MB/s • Read: 630MB/s
Standard Hardware Features	2U 19-inch rack-mount enclosure, hot-plug disk drives, redundant hot-plug power supplies, redundant cooling, dual GbE data ports, 10/100 management port
Hardware Compression	Optional Add-on: PCIe H/W Compression card
CPU and Memory	Intel Xeon e5504 quad-core Nehalem CPU, 4GB DDR3 1333MHz Registered DIMMs
Drive Configuration	12 x 1TB 7200 RPM SATA II Drives (12TB raw capacity) or 12 x 2TB 7200 RPM SATA II (24TB raw capacity)
Network Interface	2 x 1GbE Ports included Optional Add-on: PCIe Fibre Channel Dual 4Gbps
Expansion Array Interface	Includes external Serial Attached SCSI (SAS) ports for expansion Supports up to 4 SnapServer EXP E2000
Physical/Mounting	Width: 17.2 in (437 mm), Height: 3.5 in (89 mm) 2U, Depth: 25.5 in (648 mm), Weight: 55 lbs 19 in rack mount slide rails included Minimum rack depth 32 in (812.8 mm)
Agency Approvals	CE, cULus, FCC Class A, VCCI, C-Tick     
Power	800W auto ranging, hot swappable modules (1+1 Redundant) 100-240VAC, 50-60Hz, 10 - 4 Amp
Power Consumption Idle	Idle: 299W 2.63Amps; Peak: 312W 2.77Amps
Environmental Limits Operating	Temperature Range: 10° C to 35° C (50° F to 95° F), Humidity Range: 8% - 90% non-condensing, Altitude: -200 ft. to 10,000 ft. (0m to 3,048m)
Included with Unit	Custom 19 in rackmount slide rails, Power Cords for US, UK and EU
Standard Warranty	OverlandCare Level 1: 3-year: 24x7 Telephone Support, Advanced parts replacement, 2 business day delivery. For full details of all our service programs, please contact your preferred authorized reseller or contact Overland Storage directly at +1 (858) 571-5555.

Sales Offices

North America
125 S. Market Street
San Jose, CA 95113
USA
Tel: (858) 571-5555

Asia Pacific
8 Wilkie road #03-08
Wilkie Edge
Singapore 228095
Tel: +65 62811 073

France
18 Rue Jean Rostand
Orsay
91400, France
Tel: +33 1 81 91 73 40

Germany
Wilhelm Wagenfeld Straße 28
80807 München
Germany
Tel: +49 89 329 890 800

United Kingdom
Ashville Way
Wokingham, Berkshire
RG41 2PL England
Tel: +44 1 189 898 000

DSREO-0613-03



©2013 Overland Storage. All trademarks and registered trademarks are the property of their respective owners. The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. Overland Storage shall not be liable for technical or editorial errors or omissions contained herein.